


Sealed Rechargeable Ni-MH Cylindrical Cell


Specifications

| | | | |
|----------------------------|-----------------|----------------------------------|--------------|
| Nominal voltage | | 1.2V | |
| Capacity (mAh) | | 0.2C discharge | 1C discharge |
| | Minimum | 8000 | 7910 |
| | Typical | 8040 | 8000 |
| Dimensions (mm) | Diameter | $33.0^{+0.0}_{-0.5}$ | |
| | Height | $61.0^{+0.0}_{-1.0}$ | |
| Weight (g) | 165 | | |
| Charge | Standard | 800mA(0.1C)×16hrs | |
| | Rapid | 4000mA(0.5C)×135mins or dV=-10mV | |
| Ambient temperature () | Standard charge | 0 to 45 | |
| | Rapid charge | 10 to 45 | |
| | Discharge | -20 to 65 | |
| | Storage | -10 to 45 | |


(CELL DIMENSIONS)

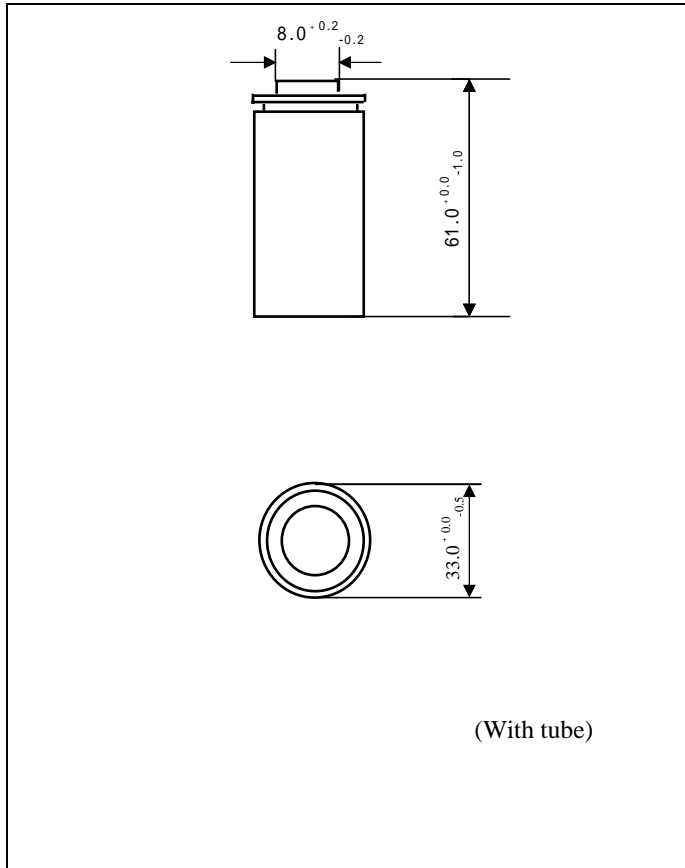

Charge Characteristics

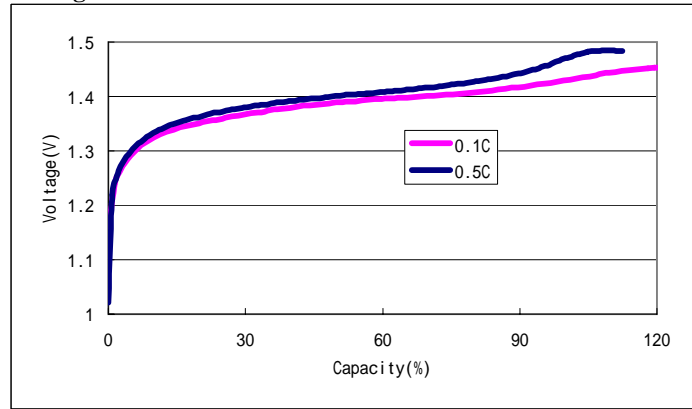

Discharge Characteristics

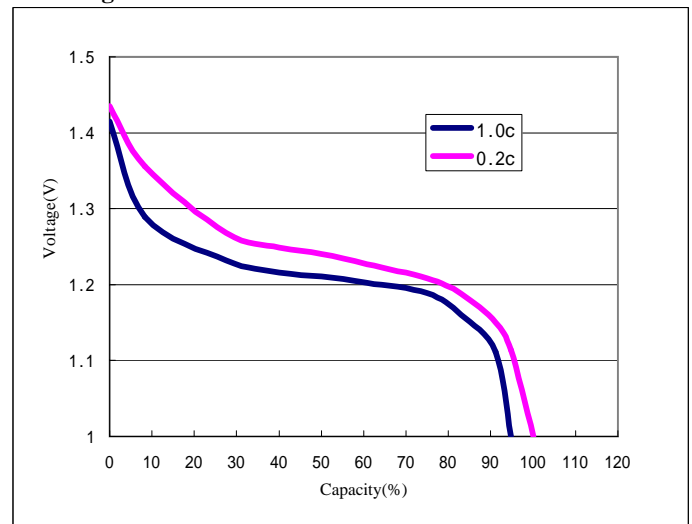

Cycle Characteristics

