


## Sealed Rechargeable Ni-MH Cylindrical Cell


### Specifications

Nominal voltage		1.2V	
Capacity (mAh)	0.2C discharge		
	Minimum	2150	
	Typical	2300	
Dimensions (mm)	Diameter	14.5 <sup>+0.0</sup> <sub>-0.5</sub>	
	Height	50.5 <sup>+0.0</sup> <sub>-1.0</sub>	
Weight (g)	30		
Cycle life		500 cycles	
Charge	Standard	230mA(0.1C)×15hrs	
	Rapid	460mA(0.2C)×360mins or dV=-10mV	
Ambient temperature (°C)	Standard charge	0°C to 45°C	
	Rapid charge	10°C to 45°C	
	Discharge	-20°C to 65°C	
	Storage	-10°C to 45°C	


### (CELL DIMENSIONS)

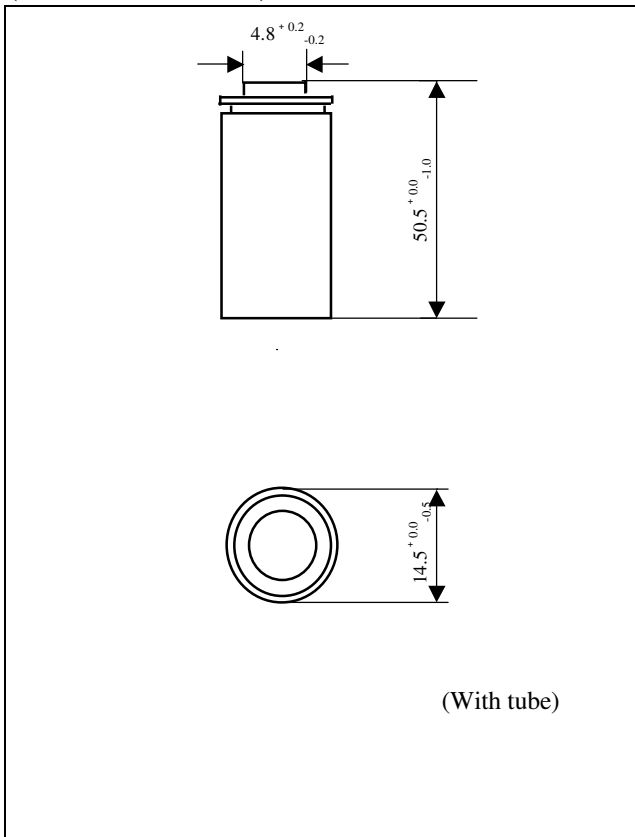

### Charge Characteristics

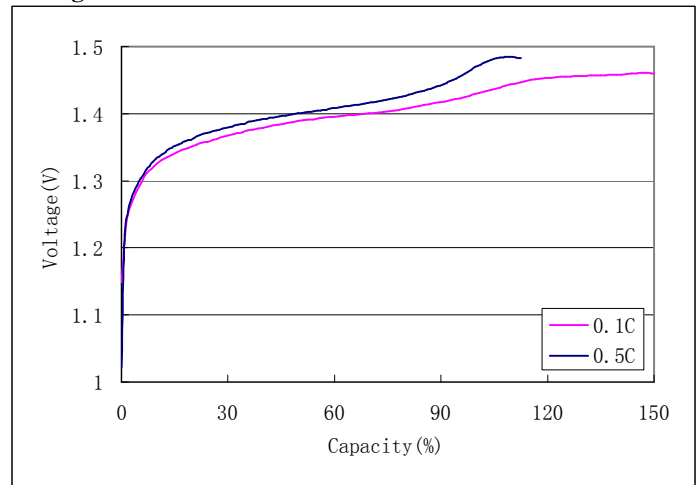

### Discharge Characteristics

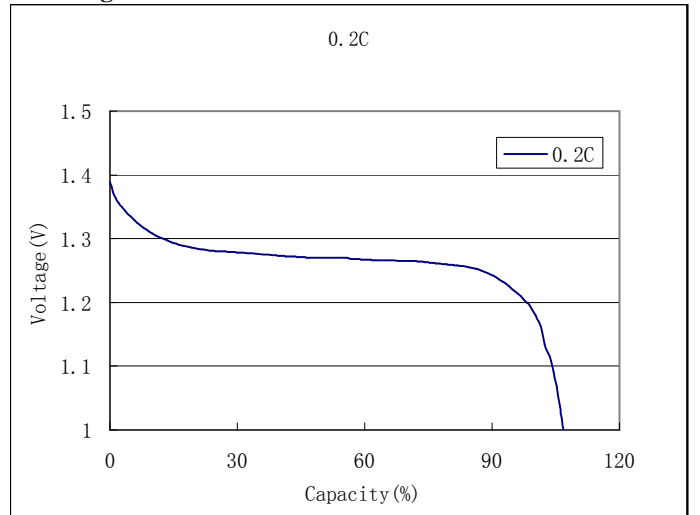

### Cycle Characteristics

