


Sealed Rechargeable Ni-MH Cylindrical Cell


Specifications

Nominal voltage		1.2V	
Capacity (mAh)		0.2C discharge	1C discharge
	Minimum	5000	4860
	Typical	5040	5000
Dimensions (mm)	Diameter	26.0 ^{+0.0} _{-1.0}	
	Height	50.0 ^{+0.2} _{-1.0}	
Weight (g)	90		
Cycle life		500cycles	
Charge	Standard	500mA(0.1C)×16hrs	
	Rapid	2500mA(0.5C)×135mins or dV=-10mV	
Ambient temperature ()	Standard charge	0 to 45	
	Rapid charge	10 to 45	
	Discharge	-20 to 65	
	Storage	-10 to 45	


Charge Characteristics

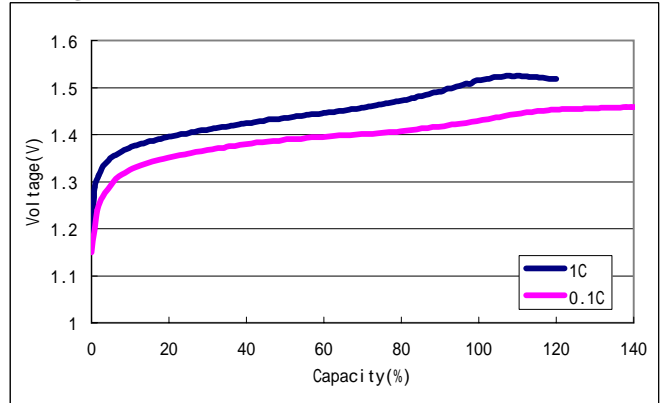

Discharge Characteristics

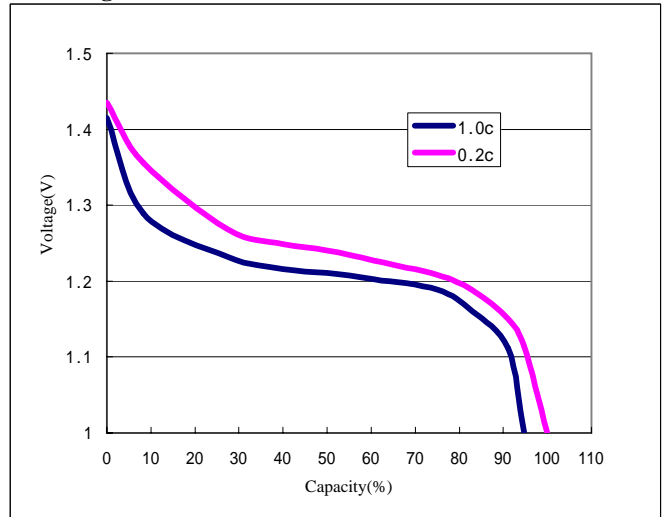

(CELL DIMENSIONS)

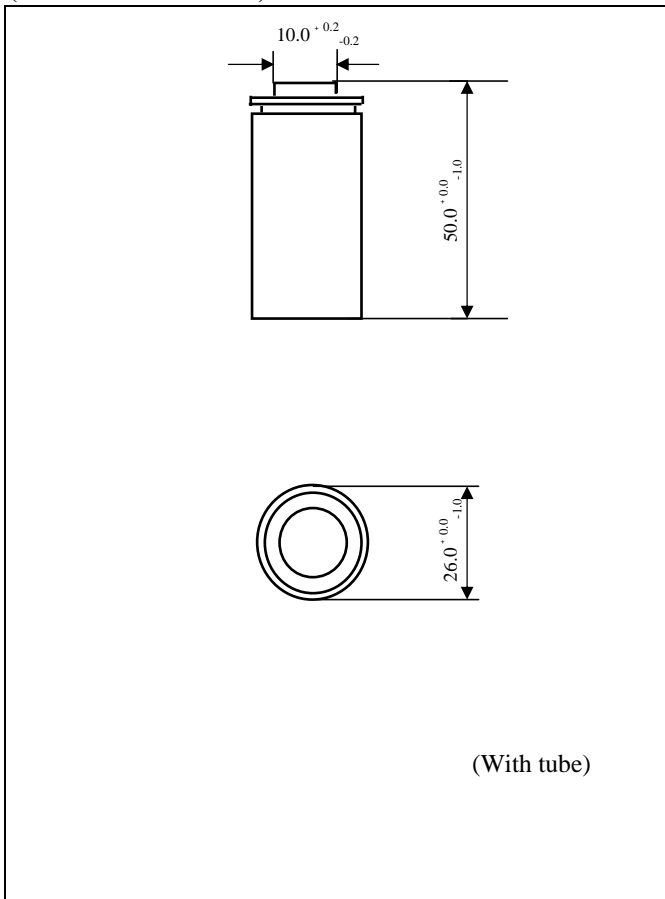

Cycle Characteristics

