


## Sealed Rechargeable Ni-MH Prismatic Cell


### Specifications

Nominal voltage		1.2V	
Capacity (mAh)		0.2C discharge	1C discharge
	Minimum	500	480
	Typical	530	500
Dimensions (mm)	Thickness	$6.1^{+0.0}_{-0.5}$	
	Width	$17.0^{+0.0}_{-0.5}$	
	Height	$36.0^{+0.0}_{-1.0}$	
Weight (g)	13		
Internal impedance(m $\Omega$ ) after charge		30	
Cycle life		300 cycles	
Charge	Standard	50mA(0.1C) $\times$ 14hrs	
	Rapid	500mA(1C) $\times$ 1.2hrs and dV=-10mV	
Ambient temperature ( $^{\circ}$ C)	Standard charge	0 to 45	
	Rapid charge	10 to 45	
	Discharge	-20 to 65	
	Storage	-10 to 45	


### (CELL DIMENSIONS)

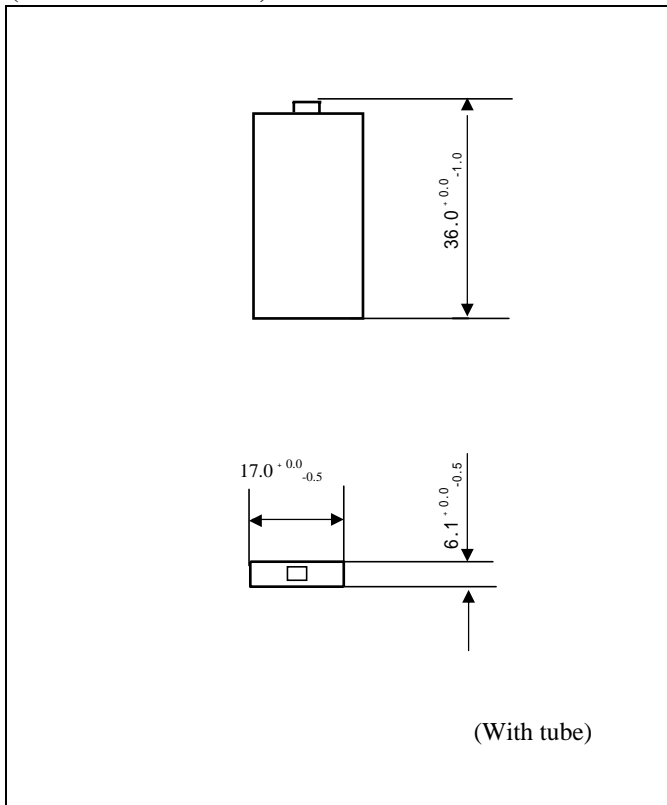

### Charge Characteristics

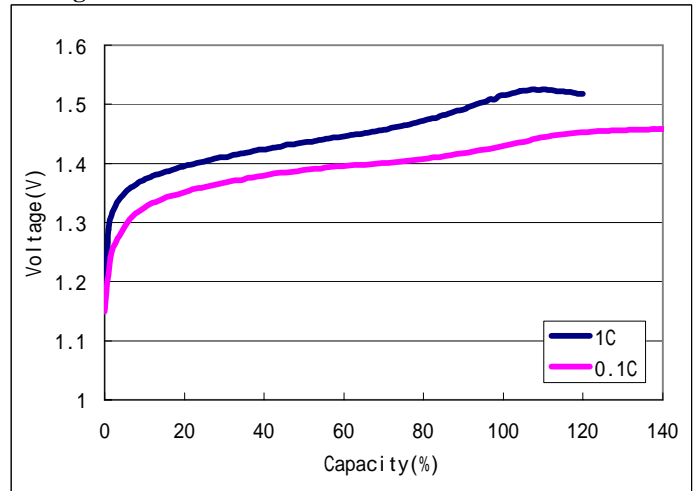

### Discharge Characteristics

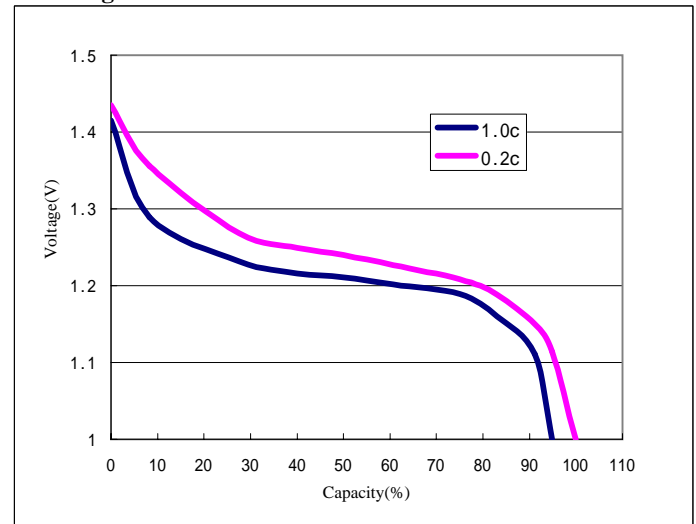

### Cycle Characteristics

