


Sealed Rechargeable Ni-MH Prismatic Cell


Specifications

Nominal voltage		1.2V	
Capacity (mAh)		0.2C discharge	1C discharge
	Minimum	1200	1140
	Typical	1260	1200
Dimensions (mm)	Thickness	$6.1^{+0.0}_{-0.5}$	
	Width	$17.0^{+0.0}_{-0.5}$	
	Height	$67.0^{+0.0}_{-1.0}$	
Weight (g)	25		
Internal impedance(m Ω) after charge		30	
Cycle life		300 cycles	
Charge	Standard	120mA(0.1C) \times 14hrs	
	Rapid	1200mA(1C) \times 1.2hrs or $dV=-10mV$	
Ambient temperature ($^{\circ}C$)	Standard charge	0 to 45	
	Rapid charge	10 to 45	
	Discharge	-20 to 65	
	Storage	-10 to 45	


(CELL DIMENSIONS)

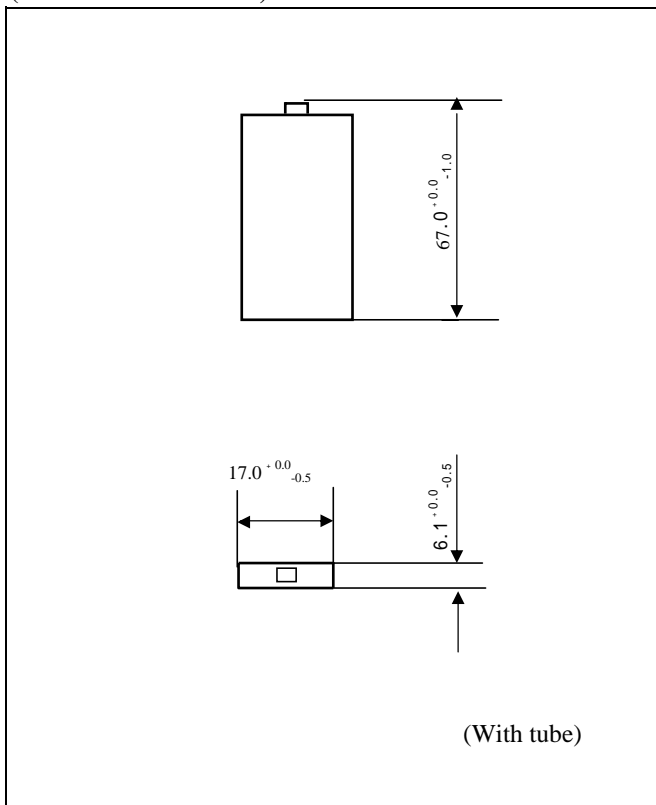

Charge Characteristics

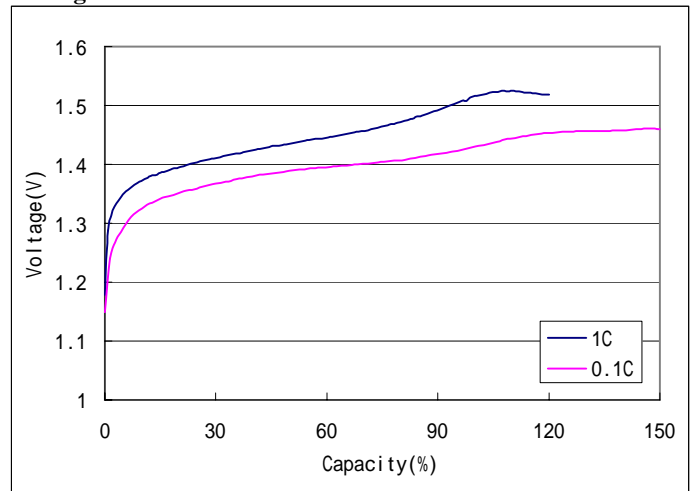

Discharge Characteristics

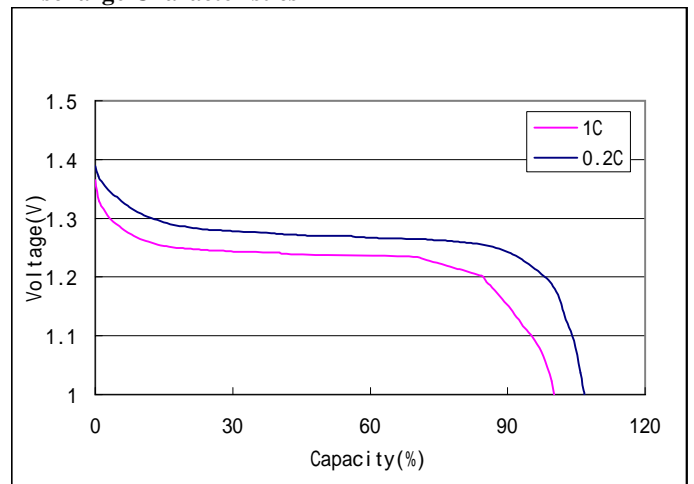

Cycle Characteristics

