


Sealed Rechargeable Ni-MH Prismatic Cell


Specifications

Nominal voltage		1.2V	
Capacity (mAh)		0.2C discharge	1C discharge
	Minimum	700	670
	Typical	730	700
Dimensions (mm)	Thickness	6.1 ^{+0.0} _{-0.5}	
	Width	17.0 ^{+0.0} _{-0.5}	
	Height	48.0 ^{+0.0} _{-1.0}	
Weight (g)	18		
Internal impedance(mΩ) after charge		30	
Cycle life		300 cycles	
Charge	Standard	70mA(0.1C)×14hrs	
	Rapid	700mA(1C)×1.2hrs and dV=-10mV	
Ambient temperature ()	Standard charge	0 to 45	
	Rapid charge	10 to 45	
	Discharge	-20 to 65	
	Storage	-10 to 45	


(CELL DIMENSIONS)

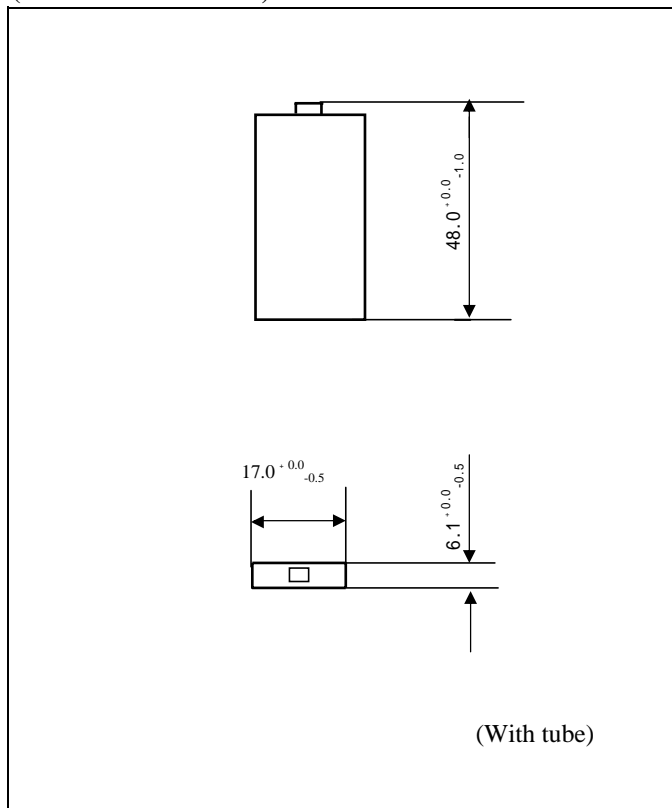

Charge Characteristics

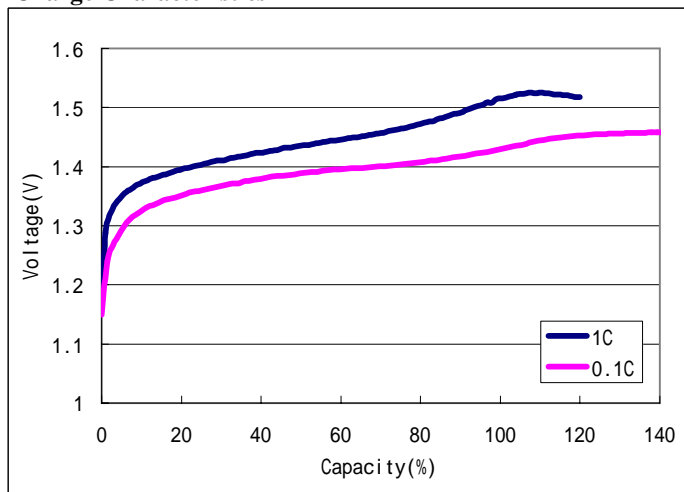

Discharge Characteristics

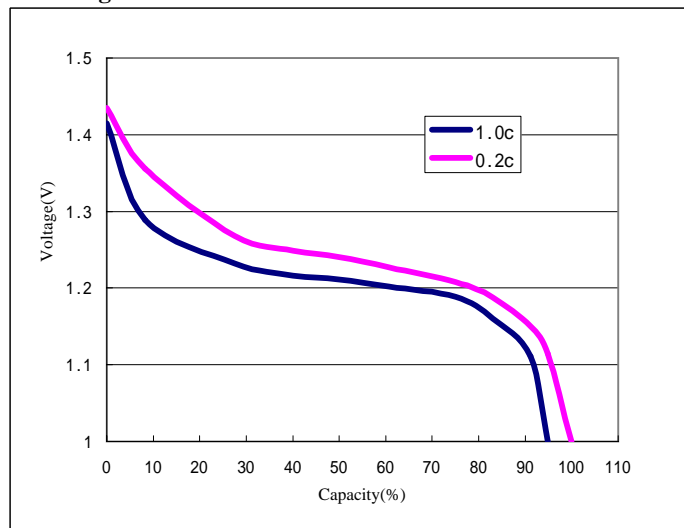

Cycle Characteristics

