


# Sealed Rechargeable Ni-MH Cylindrical Cell


## Specifications

Nominal voltage		1.2V	
Capacity (mAh)		0.2C discharge	1C discharge
	Minimum	3000	2850
	Typical	3300	3000
Dimensions (mm)	Diameter	23.0 <sup>+0.0</sup> <sub>-1.0</sub>	
	Height	43.0 <sup>+0.0</sup> <sub>-1.0</sub>	
Weight (g)	60		
Cycle life		300cycles	
Charge	Standard	300mA(0.1C)×15hrs	
	Rapid	3000mA(1C)×1.2hrs or dV=-10mV	
Ambient temperature ( )	Standard charge	0 to 45	
	Rapid charge	10 to 45	
	Discharge	-20 to 65	
	Storage	-10 to 45	


## (CELL DIMENSIONS)

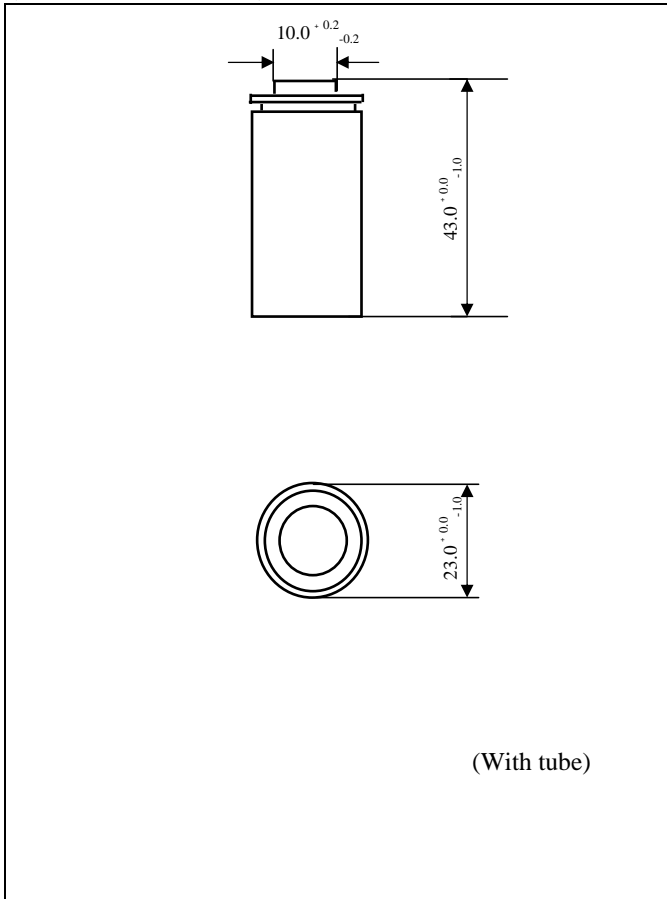

## Charge Characteristics

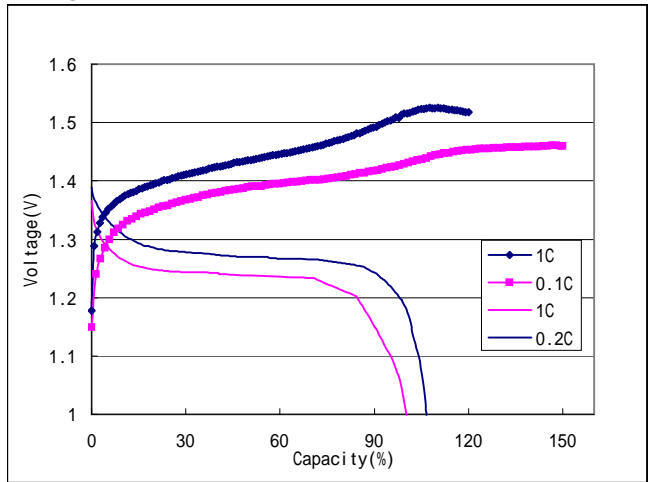

## Discharge Characteristics

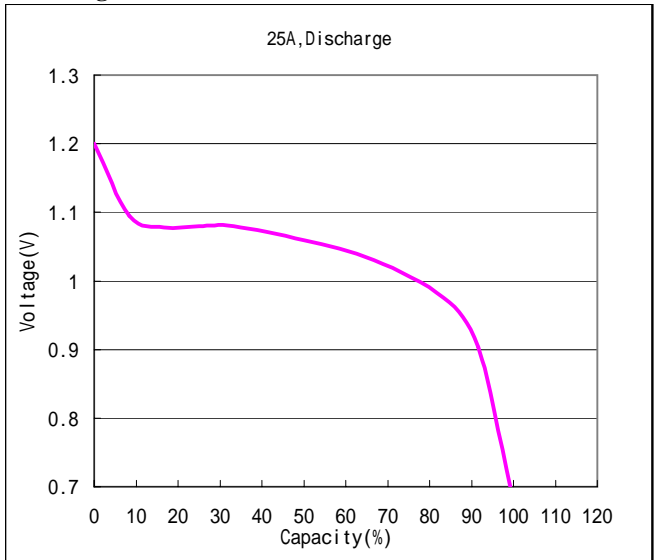

## Cycle Characteristics

